



AGS1000 SERIES CONTROL PANEL


The AGS1000 series control panel is used to connect gas detectors of AIYI Technologies. Each channel configuration is customizable with reliable performance. Among them, AGS1000B is equipped with UPS uninterruptible power supply, and AGS1000D is an explosion-proof type, which can meet the different needs of different places. They are widely used in petroleum, chemical, energy, steel, metallurgy, gas, and other industries.


Features

- 4-20mA, RS485 signal input is optional.
- Up to 64 channels (RS485), up to 32 channels (4-20mA),
- Large color LCD display with rich information and sound alarm.
- Real-time status indication with light for power, alarm, fault and self-test.
- Multi functions with channel block, alarm set, and fault alarm. Support to check alarm records and fault records.
- AGS1000B has a built-in UPS, which can still work normally after the main power is cut off.
- Built-in 3 relays (alarm-1, alarm-2 and fault)
- Wall-mounted carbon steel housing, much durable.

Specifications

Description	Specifications	AGS1000	AGS1000B	AGS1000D
Function				
channels	4-20mA: 8/16/24/32 is optional	•	•	•
chamicis	RS485: up to 64 channels	•	•	•
suitable detector	detectors with 4-20mA or AE-RS485	•	•	•
Electric				
power supply	220VAC	•	•	•
power consumption	≤8W	•	•	•
signal input	RS485/4-20mA	•	•	•
signal output	RS485	•	•	•
wiring	4-20mA: three-wire	•	•	•
wiring	RS485: four-wire	•	•	•
suitable cable	RVVP3*1.5/4*1.0mm2	•	•	•
relay output	3 passive relay (250VAC/5A 30VDC/5A)	•	•	•
Display & Operation				
display	LCD	•	•	•
indicator light	alarm, fault, power, self-test	•	-	•
indicator light	power,backup power,alarm,fault,block	-	•	12
operation method	button	•	•	•
Environment				
operating temp.	0°C~40°C	•	•	•
operating humidity	10∼95%RH non-condensing	•	•	•
operating pressure	80-120kPa	•	•	•
Structure				
body material	carbon steel withelectrostatic spraying	•	•	•
	about 7.5kg	•	-	-
weight	about 16.5kg	-	•	_
	about 50kg		-	•
	500*360*100mm(H*W*D)	•	_	-
Dimensions	590*400*155mm(H*W*D)	-		-
	700*620*244mm(H*W*D)	-	_	•
Certificate				
SIL	SIL2	•	1-1	L=)
EX	Exd II BT6	_	_	•

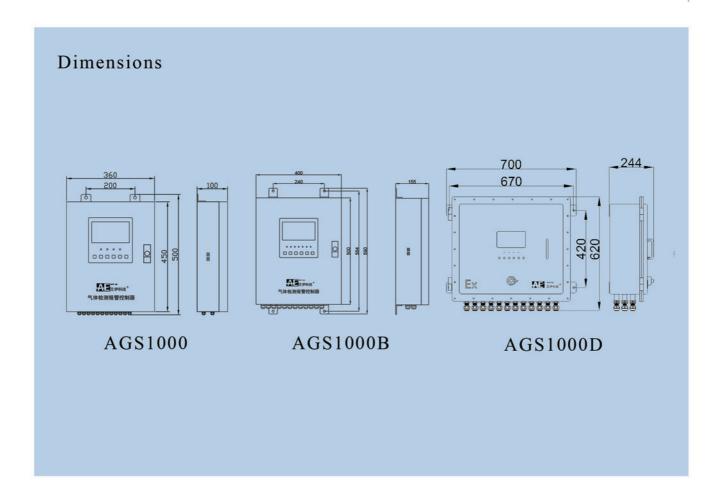

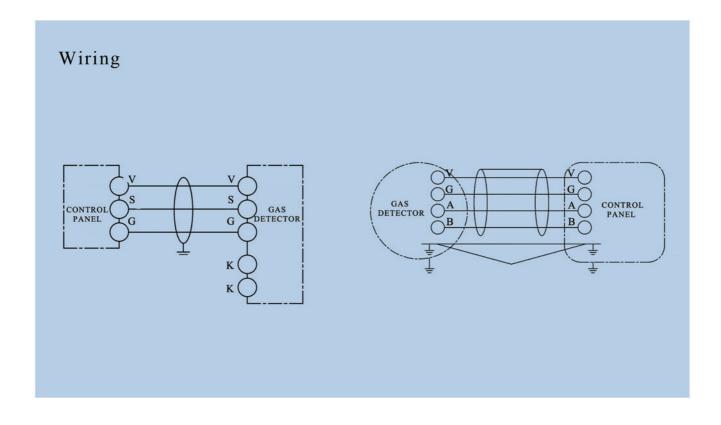





Gas detection system can be widely applied in places such as petrochemical engineering, chemical engineering, steel, metallurgy, pharmaceuticals, electricity, food, and logistics where the monitoring of flammable and toxic gas is needed.

The system is made of gas detector, controller and sound-light alarm, and the gas concentration data will be uploaded to the control panel. The controller collectively displays the gas concentration data of different monitoring points, and the sound-light alarm will be set off in case that any concentration exceeds over the default value. Linkage feature can be realized and the data can be also uploaded to host systems such as DCS/IPC.

FUNCTION

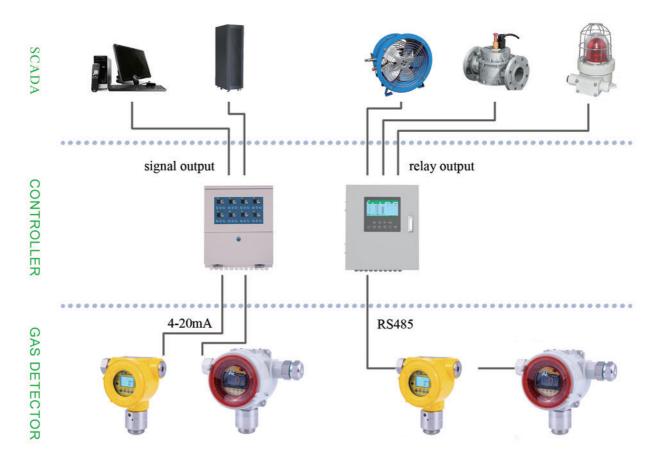


DIAGRAM of GAS DETECTION SYSTEM

1. gas detector

The gas detector is fixed in areas such as the workshop, warehouse, and storage tank for real-time monitoring of the concentration of flammable and toxic gases.

2. zone control

The controller collectively displays the gas concentration, and the sound-light alarm will be set off in case that any concentration exceeds over the default value.

3. The interlock control

It comes with relay output and fault output for the performing of automatic fan, spray, valve, and alarm.

4. The host computer

Standard 4-20mA and RS485 signal output, compatible with host computers such as DCS/PLC/IPC.



SELECTION GUIDE

QUICK SELECTION TABLE 1 -- FIXED GAS DETECTOR

		A	AG310 serie	es			AG21	0 series		A	G200 ser	ies
Description	GTQ- AF110	GTQ- AF111	AF110-R	AG310	AG311	AG210	AG211	GTQ- Anr-A	GTQ- Anr-D	AG200	Anr-N	Anr-S
Gas detected												
combustible gas-catalytic	•	•	-	-	-	-	-	•	•	-	•	•
combustible gas-infrared	-		•		-	-	-	-	-	-	-	:
toxic gas-electrochemical	-	-	-	•	•	•	•	2	120	•	-	746
toxic gas-PID	-	-	-	•	•	•	•	-	-	•	=	-
toxic gas-infrared	-	-	-	•	•	•	•	-	1-1	•	-	-
toxic gas-semiconductor	-	-	-	•	•	-	-	-	-	-	=	-
Display												
OLED	•	•	•	•	•	_	- 2	-	123	-	-	-
LCD	-	-	-	8.7.3	-	•	•	•	•	-	-	7-2
Signal output												
4-20mA	•	-	•	•	-	•	5.73	•	-	•	•	-
RS485	-	•	-	29-1	•	3-0	•	-	•	•	-	•
Wiring												
three-wire	•	-	•	•	-	•	-	•	-	•	•	-
four-wire	-	•	-	-	•	_	•	-	•	•	-	•

Note:

- 1. means available, means unavailable;
- 2. both oxygen and toxic gas are detected in electrochemical principle, so the toxic gas includes oxygen in the above table.

QUICK SELECTION TABLE 2 -- CONTROL PANEL

Description	AGS1600F	AGS1000	AGS1000B	AGS1000D	JUDD	JUDD-S
Gas detected						
combustible gas	•	•	•	•	•	•
toxic gas	724	•	•	•	•	•
Display						
LCD	•	•	•	•		-
OLED	-	-	-	175	•	•
Signal input						
4-20mA	•	•	•	•	•	•
RS485	-	•	•	•		<u> </u>
Wiring						
three-wire	•	•	•	•	•	•
four-wire	-	•	•	•	-	-
Channels	4	1-64	1-64	1-64	1-8	32-128
Installation						
wall-mounted type	•	•	•	•	•	-
cabinet type	-	14	=	-	- 4	•
UPS	-	-	•	-	-	-
Explosion-proof	-		<u>e</u>	•	-	-

Note: The channels of AGS1000, AGS1000B, AGS1000D, JUDD, JUDD-S can be customized.

í		
į		
(
ĺ		
6		
ζ	,	
7		
`		
•	4	
ļ		
ž	Y	
E		
į		
١		
Ę		
į		
ζ	,	
1		
į		
c		

(
• • •
•
•
•
•
• 1 1 1 1 1 1
1%LEL 1%LEL 0.1%VOL 1µmol/mol 1µmol/mol 0.1µmol/mol -
1%LEL 1%LEL 1%LEL 1mol/m emical lµmol/m emical lµmol/m
Catalytic Infrared Electrochemical /mol Electrochemical
Catalytic Infrared Electrochemical

Note: 1. Any gas that not mentioned above, just contact AIYI Technologies for further information; 2, 1µmol/mol=1ppm







TEL:0086-25-87787361 WEB:www.AIYITEC.com

FAX: 0086-25-87787362 EMAIL: sales@autequ.com

Authorized Distributor:

Disclaimer: All pictures, configurations and parameters in this document are for reference only. There may be differences with the actual products. Any difference is subject to the latest real products.